

Renewable Energy: Photovoltaic Modules



250 Watts

Surpass Performance Multi (Poly) - crystalline Silicon PV module


Ekarat Engineering's 250 Watts PV module is produced under a stage of the art automatic assembly machines to ensure a consistency and reliability of production quality. The 250 Watts PV module is commonly used for wide range applications such as commercial building, solar power plant, telecommunication station, particularly with grid-connected systems.

High efficiency module, 15.36%, is a result of solar cell's superior power output, which has been developed by our own solar cell factory. Moreover, other component materials are also selected to comply with international standards such as IEC and TIS. These create a customer's confidence ensured with a manufacturing based 25 years limited warranty*.



- Low iron tempered glass allows a high light transmission rate with a great robustness.
- EVA encapsulate sheet, back-sheet, and clear anodized aluminum Alloy frame are technically equipped to protect the module against all weather condition.
- Junction box with IP67 to ensure water proof and prolong lifetime operation.
- Special cable with connectors is offered as option for easy interconnection in grid-connected systems as well as stand-alone systems.
- Bypass diode included in promptly provided junction box is to prevent the power dropped by partial shading.
- Square Cell 156×156mm (6 inches)
- UV Protection Approve

LINEAR PERFORMANCE WARRANTY

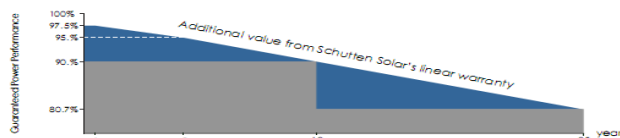

Electrical Characteristics

12 YEARS

Guarantee on product material and workmanship

25 YEARS

Linear power output warranty

Model No.	EE2250
Maximum power (Pmax)	250 W
Power tolerance	0,+3%
No. of connected cells	60
Voltage of Pmax (Vmp)	30.60 V
Current at Pmax (Imp)	8.17 A
Short - Circuit current (Isc)	8.75 A
Open - Circuit voltage (Voc)	37.64 V
Temperature Coefficient of Voc	-0.28 % / °C
Temperature Coefficient of Isc	0.055 % / °C
Temperature Coefficient of power	-0.375 % / °C
Maximum series fuse rating	15 A
Maximum voltage system	1,000 V
Operating Temperature	-40°C ~ +85°C

CONTACT US: Ekarat Engineering Public Company Limited

9/291 U.M.Tower BLDG.,28 Fl., Ramkamhaeng Rd, Suanluang District, Bangkok.10250 Thailand

Tel. +66 2 719 8777

Fax. +66 2 719 8760

e-mail salesolar2016@gmail.com

Web site <http://ekarat-transformer.com>

Specifications subject to technical changes
© Ekarat Engineering PCL.

Renewable Energy: Photovoltaic Modules



Mechanical Characteristics

Dimension	1640 x 992 x 40 mm.
Weight	19 kg.
Production tolerance	± 3 %
Junction Box	Degree of protection: IP67 and compatibility with 2.5 - 4.0 mm cross section cable size.
Connector	MC4 Compatible
Diode	Silicon or Schottky By - pass diode for every 20 cells connection.
Frame	Anodized Aluminum Alloy Frame
Construction structure	Front: High light transmission tempered glass with 3.20 mm thickness. Back: Weather proof back sheet material. Laminated Material: EVA.
Excellent loading capability	2400Pa wind loads,5400Pa snow loads


Qualification and testing

ISO 9001,ISO14001,OHSAS18001,TIS18001,ISO50001 for qualify management system.
IEC 61215 : Crystalline silicon terrestrial PV modules— Design qualification and type approval.
IEC 61730 : PV module safety qualification. To ensure a safety for users and installing operator of our products.
TIS 1843-2553 : Thailand Industrial Standard equivalents to IEC 61215.
TIS 2580 Part 2 -2555 : Thailand Industrial Standard equivalents to IEC 61730.




TIS-1843-2553
TIS-2580-2555

Module drawing diagram

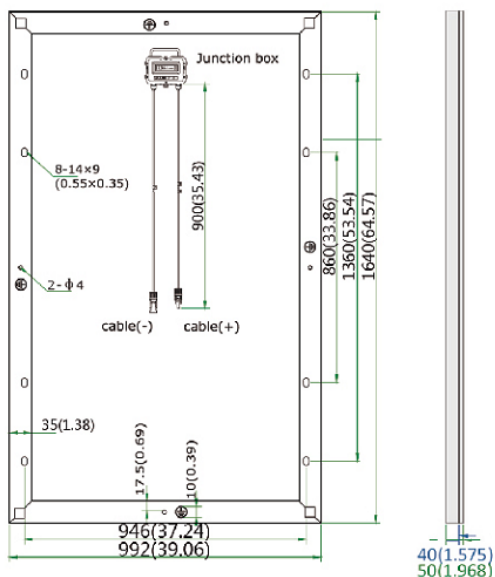

IV - curves

Irradiance
1,000 W/m², 800 W/m², and 600 W/m²

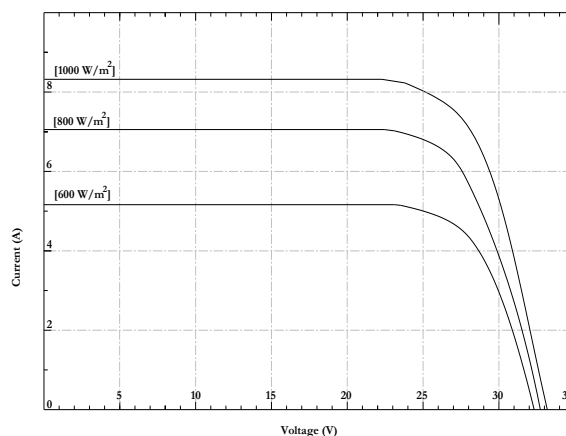

These data represent the performance of typical modules as measured at their out put terminals, and do not include the effect of such additional equipment as diodes or cables. The data are based on measurements made in accordance with ASTM E1036-85 corrected to SRC (Standard Reporting Conditions, also known as STC or Standard Test Conditions), which are:

- Illumination of 1kW/m² (1sun) at spectral distribution of AM1.5 (ASTME892-87 global spectral irradiance);
- Cell temperature of 25°C.

CONTACT US: Ekarat Engineering Public Company Limited

Solar Module Factory / Maintenance&Service Center

Address:190/1 Moo 6, Thasa-An,Bangpakong, Chachoengsao 24130 Thailand

Tel. 66(0)38 530-224

Fax. 66(0)38 530-225

Specifications subject to technical changes
© Ekarat Engineering PCL.